



ART SPECS

Material 2-4 mil thick (Fig. A):

Minimum space between letters/graphics.....	0.020"
Minimum stroke width of letters/graphics.....	0.050"

Material thicker than 4 mil (Fig. B):


Minimum space between letters/graphics.....	0.031"
Minimum stroke width of letters/graphics.....	0.0625"

Smallest area that can be "picked".....0.031"


For additional information on art setup, please see [Art Specs](#).

MINIMUM LETTER AND GRAPHIC STROKE

**MINIMUM SIZE FOR
2-4 MIL MATERIAL
(Fig. A)**

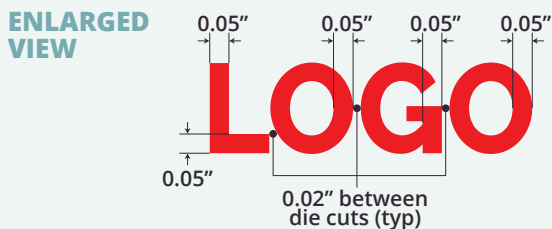

**MINIMUM SIZE FOR
MATERIAL >4 MIL
(Fig. B)**

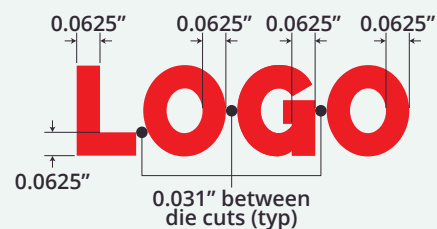

TM




TM

100% - minimum sizes for ® / TM

DOMING INFORMATION

If you're interested in doming your pre-spaced decal, note that the art specs are significantly different. Doming liquid will not flow to a point, so all corners must be rounded, and graphic thickness and space between are much larger than what is listed above.

Please refer to our [Crystal-Line Doming](#) page on our website, or go to our PDF Downloads for the [Doming Art Specs](#).

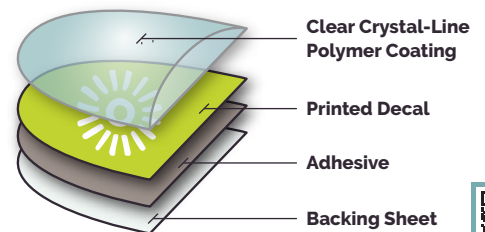

P/N: 100208B PRE-SPACE_INSERT_2019

